

GGT Footing Installation Guide



Polysols Inc. is only providing the product to you. You assume responsibility of sand procurement, installation, blending, watering, and maintenance.


Installing Footing Yourself:

Installing footing yourself is a great option to save money when upgrading your footing. Please read instructions fully and completely to ensure proper installation.

These steps are critical for the success of installation and continued footing quality.

Step One: Divide Arena into Quadrants

Divide your arena into quadrants and place the same number of footing bales into each section.

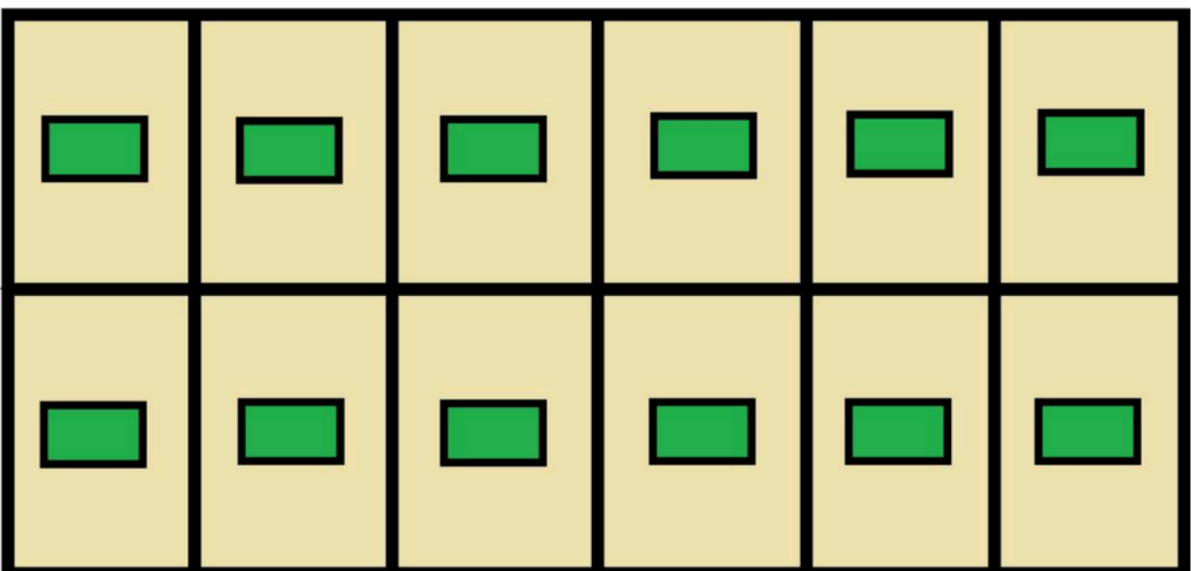

*For easier installation- Break down bales in smaller amounts and water material before blending and conditioning.

Step Two: Remove Wires and Distribute Footing

- Each bale of footing is shipped with 3 bands. Remove ALL wires.
- One wires have been removed, use a hand rake to distribute material across the surface and evenly as possible.



Step Three: Blend Sand and Footing

- Using a Harley rake, reverse tiller, or rototiller, mix the footing into the sand.
- You MUST mix the footing without going into the base footing. Be sure to adjust the teeth and tines on your groomer high enough so that they do not drop into the base.
- Initial mixing may take several hours to thoroughly blend.

Step Four: Watering the Arena

After adequately mixing the sand and footing, heavily water the arena. Then roll with a solid roller to help bind the materials together.

- Once all the materials are well blended, you can ride on your newly installed GGT Footing arena!
- Please be aware that it may take several weeks for the footing to completely mesh and form your desired texture.
- Over time you will learn how frequently you need to condition and water your arena to your personal preference.

For questions or concerns, please contact us at 864-5479-4484